



AHL-LIGHT 1

LED CAMERA LIGHT

AHL-LIGHT 1 is radiation tolerant LED light used during underwater inspections in confined areas. The light emits 900 lumen and gives plenty of light without adding significant weight to the system in which it is used.

APPLICATIONS

- Attached to tools, robots and manipulators or hanging in its cable
- Ideal during inspections in confined areas.
- Powered by a camera control unit or lighting power unit

BENEFITS


- Small-sized and low-weight light
- 900 lumen light output
- Color temperature suitable for inspections
- Low maintenance cost due to its long life-time

SPECIFICATIONS


Diameter	29 mm (1,1")
Height	84 mm (3,3")
Weight	0,3 kg, (0,7 lbs)
Housing material	Stainless steel EN 1.4301, AISI 304/AISI 316
Front glass material	Polycarbonate
Maximum temperature	50°C, 70°C for short periods (122°F, 158°F)
Water tightness	min 6 bar (60 m)
Lights	LED
Typical luminous flux	900 lumen
Lighting beam angle	38°
Life time	>50 000 h
Radiation tolerance (total dose)	50 000 Gy (5 000 000 rad)

We reserve the right to alter specifications without prior notice

AHL-LIGHT 1 IMAGES

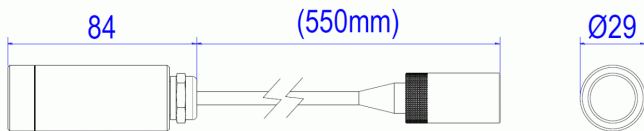

LINKS

 English

ahlbergcameras.staging.westart.se/products/lights/ahl-light-1

We reserve the right to alter specifications without prior notice