

CCTV129

TEMPERATURE AND NEUTRON TOLERANT CCTV CAMERA

CCTV129 is designed for operation in areas with medium/high levels of gamma and neutron radiation. The camera features an internal cooling system in order to handle the high temperatures in the RCP areas where it usually is installed.



APPLICATIONS

- Designed for areas with medium-high levels of gamma and neutron radiation
- Typically placed in the Reactor Coolant Pump area in a PWR

BENEFITS


- Auto-focus and auto-iris
- Medium neutron shielding
- Easy maintenance
- Designed to handle high ambient temperatures

SPECIFICATIONS


Diameter	129 mm (5,1")
Length	335 mm (13,2")
Weight	13,5 kg (29,7 lbs)
Housing material	Stainless steel EN 1.4301
Radiation tolerance (dose rate)	500 Gy/h (50 000 rad/h)
Radiation tolerance (total dose)	5 000 Gy (500 000 rad)
Radiation tolerance neutrons	Medium
Maximum temperature	55°C (131°F)
Cooling	Peltier elements
Protection class	IP65
Zoom	x10 optical x10 digital giving x100
SD horizontal angle of view	36° (wide end), 5.1° (tele end)
Resolution SD version	720 TV-lines

We reserve the right to alter specifications without prior notice

CCTV129 IMAGES

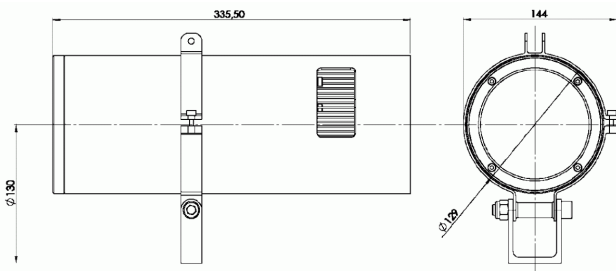

LINKS

 English

ahlbergcameras.staging.westart.se/products/cctv-cameras/cctv129

We reserve the right to alter specifications without prior notice