



# LIGHTING CABLE T3X2,5

## HALOGEN LIGHTING CABLE

T3\*2,5 is an underwater cable used for Ahlberg lighting equipment. The cable is reinforced with an internal steel wire in order to resist the weight from hanging lamps.

### APPLICATIONS

- Cable for light in air or underwater use

### BENEFITS


- A strong flexible cable with internal steel wire for Ahlberg lighting equipment

### SPECIFICATIONS


Number of conductors	3
Diameter	12 mm (0,47")
Outer sheath	VDE0250 polyurethane
Color	Yellow
Minimum bend radius, fixed installation	90 mm (3,55")
Minimum bend radius, flexible installation	180 mm (7,09")
Temperature rating	-25°C to +70°C (-13°F to +158°F)
Weight	0,20 kg/m
Tensile strength	3 700 N
Radiation tolerance (total dose)	100 000 Gy (10 000 000 rad)

*We reserve the right to alter specifications without prior notice*

## LIGHTING CABLE T3X2,5 IMAGES

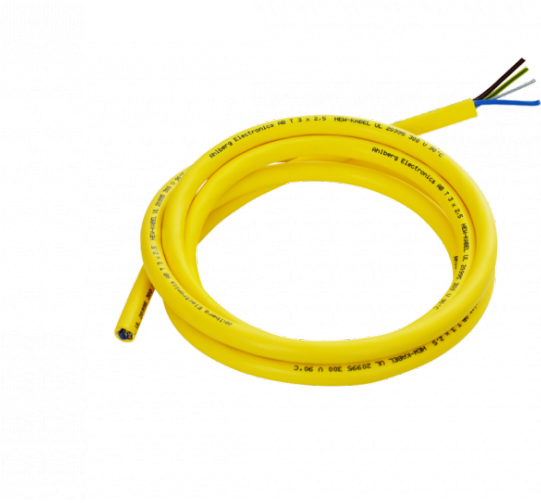

### LINKS

 English

[ahlbergcameras.staging.westart.se/products/cables/lighting-cable-t3x25](https://ahlbergcameras.staging.westart.se/products/cables/lighting-cable-t3x25)

*We reserve the right to alter specifications without prior notice*

---